

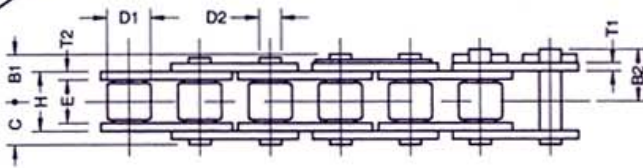


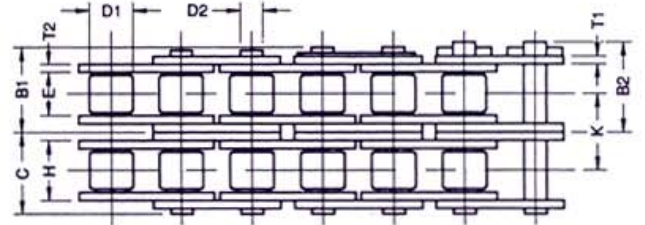

"G" TYPE CHAIN

**ISO
STANDARD**


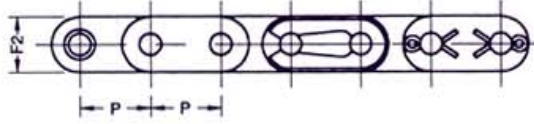


Transmisión s.a.

ISO Chain No.	Pitch x Width		Roller	Pin				Links				Avg. Ulti. Tensile Strength	Approx Weight
	P x E			D1	C	B1	B2	D2	T1	T2	H		
	inch	mm	mm									mm	mm
C08B	1/2 x 5/16	12.7 x 7.75	8.51	8.17	9.17	10.57	4.45	1.49	1.58	11.30	11.80	1980	0.73
C10B	5/8 x 3/8	15.875 x 9.65	10.16	9.78	11.18	12.17	5.08	1.71	1.71	13.28	14.70	2580	0.98
C12B	3/4 x 7/16	19.05 x 11.68	12.07	11.18	12.28	14.48	5.72	1.86	1.86	15.62	16.10	3225	1.28
C16B	1 x 0.67	25.40 x 17.02	15.88	17.82	20.79	21.69	8.28	3.18	3.99	25.45	21.00	7525	2.89
C20B	1 1/4 x 0.77	31.75 x 19.56	19.05	19.95	-	24.25	10.19	3.18	4.46	29.01	26.40	10000	3.85

NOTE: Multiple strands "C" Type chains available.

**ANSI
STANDARD**

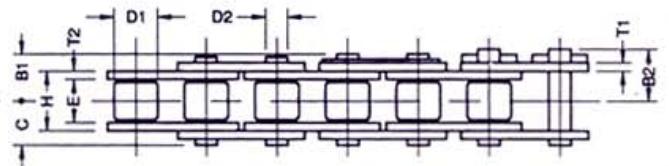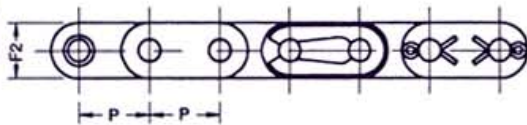

ANSI Chain No.	Pitch x Width		Roller	Pin				Links				Avg. Ulti. Tensile Strength	Approx Weight
	P x E			D1	C	B1	B2	D2	T1	T2	H		
	inch	mm	mm									mm	mm
C40	1/2 x 5/16	12.70 x 7.79	7.92	8.16	9.36	10.56	3.98	1.49	1.49	11.17	12.06	1830	0.66
C50	5/8 x 3/8	15.875 x 9.52	10.16	10.15	11.55	12.32	5.09	2.01	2.01	13.84	15.08	3000	1.08
C60	3/4 x 1/2	19.05 x 12.70	11.91	12.63	14.00	15.43	5.96	2.38	2.38	17.75	18.09	4085	1.54
C80	1 x 5/8	25.40 x 15.88	15.87	16.38	18.38	20.05	7.94	3.18	3.18	22.60	24.13	7955	2.71
C100	1 1/4 x 3/4	31.75 x 19.05	19.05	20.04	-	23.90	9.54	3.99	3.99	27.45	30.16	11500	4.47

NOTE: Multiple strands "C" type chains available.