



SERIES spicer

Par Máximo: 4.125 Nm

SERIE 1600-CÓDIGO TRANSMISIÓN 47134-



1.3 Ejecución Fija-Fija (AFF)

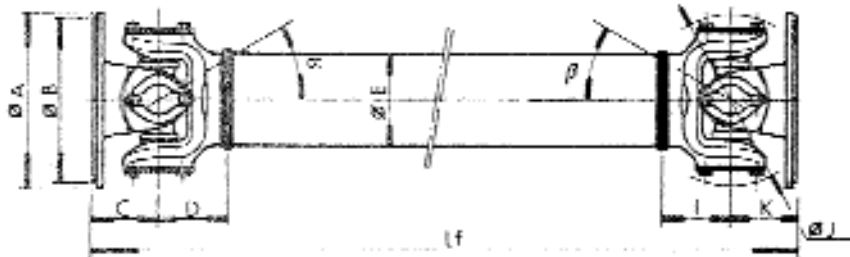

Lfmin	A	B	C	H	J	E	t	D	μ	n*	d
375	174,6	168,22	69,8	155,5	157	76/89	2,41/3	87	22°	8	9,63/10,1
375	174,6	168,22	69,8	155,5	157	76/89	2,41/3	87	30°	8	9,63/10,1
400,5	150'	90	82,5	130	157	76/89	2,41/3	87	22°	8	12,1
400,5	150'	90	82,5	130	157	76/89	2,41/3	87	22°	8	12,1

SERIE 1600-CÓDIGO TRANSMISIÓN 47134-

1.4 Ejecución Junta Doble (JD)

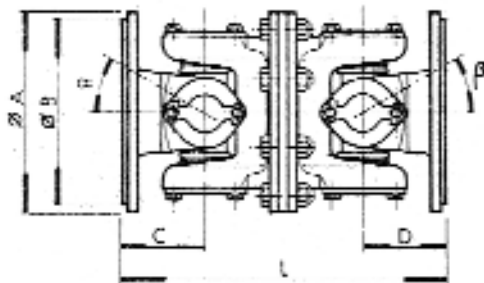

L	A	B	C	μ	F	G	D	b	n*	d
195,4	174,6	168,22	47,6	8°	174,6	168,22	47,6	8°	8	9,63/10,1
217,6	174,6	168,22	69,8	8°	174,6	168,22	47,6	8°	8	9,63/10,1
239,8	174,6	168,22	69,8	8°	174,6	168,22	47,6	8°	8	9,63/10,1
262	174,6	168,22	69,8	30°	174,6	168,22	47,6	8°	8	9,63/10,1
284,2	174,6	168,22	69,8	30°	174,6	168,22	69,8	30°	8	9,63/10,1
330	150'	90	82,5	30°	150	90	82,5	30°	8	12,1